

2019 70Mai Product Line

70Mai Smart Dash Cam

Online Date 2018/3

Version English/Russian Version

Specification

Image Sensor: SONY IMX323

Resolution: 1080P

Frame Rate: 30FPS

Aperture: F2.2

FOV: 130

CPU: MSC 8328P

Battery: 240mAh



70Mai Smart Dash Cam Pro



Online Date 2018/11

Version English/Russian Version

Specification

Image Sensor: SONY IMX335

Resolution: 1944P

Frame Rate: 30FPS

Aperture: F1.8

FOV: 140

CPU: Hi3556V100

Battery: 500mAh

70Mai Smart Dash Cam 1S

Online Date 2019/6

Language English/Russian/Japanese/Korean

Specification

Image Sensor: SONY IMX307

Resolution: 1080P

Frame Rate: 30FPS

Aperture: F2.2

FOV: 130

CPU: MSC8336D

Battery: 240mAh



70Mai Mini Dash Cam



Online Date 2019/7

Language English/Russian/Japanese/Korean

Specification

Image Sensor: OS05A10

Resolution: 1600P

Frame Rate: 30FPS

Aperture: F1.8

FOV: 140

CPU: HI3556V200

Battery: 500mAh

70Mai Smart Mirror Dash Cam

Online Date 2019/8

Language English/Russian/Japanese/Korean

Specification

Image Sensor: SONY IMX335


Resolution: 1600P

Frame Rate: 30FPS

Aperture: F1.8

CPU: HI3556V100

Battery: 500mAh

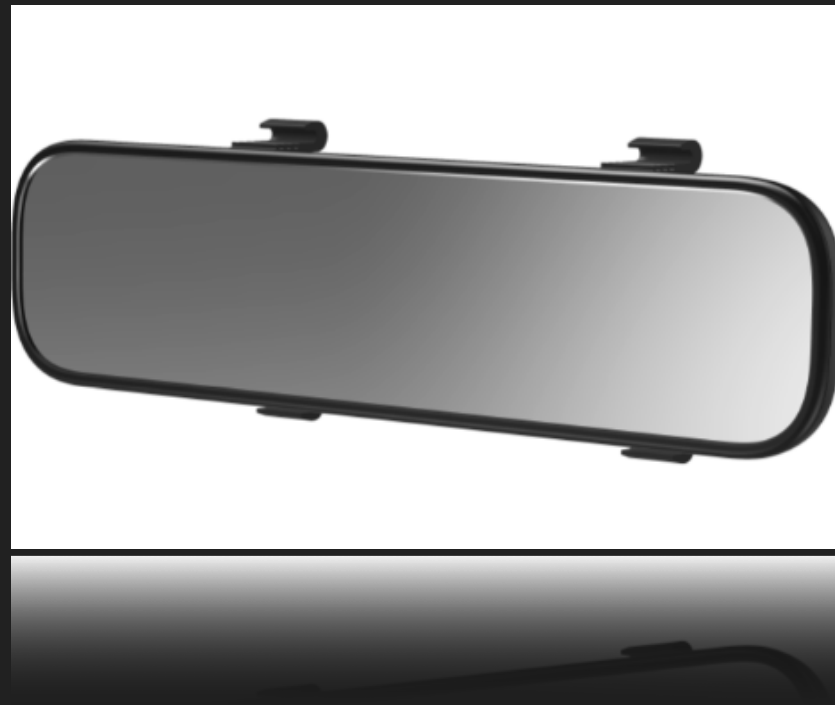

70Mai Tyre Safety Monitor



Online Date 2019/3

Version English Version

Specification

Operating Voltage:2.0~3.6V

Emission Current:1~6.6mA

Air pressure range:0~8.0Bar

Work Temperature:

-40°C ~ 125°C

Storage Temperature:

-40°C ~ 125°C

Work Frequency:433Hz

Battery Life:10 years

70Mai Wireless Car Charger Mount--Qi

Online Date 2019/2

Version English Version

Specification

Input:Micro USB

5.0V 2.0A/ 9.0V 1.6A


Output:5.0V 5W MAX

9.0V 9W MAX

Transfer Distrtance: <=4mm

Temperature: 0°C ~ 40°C

Dimension: 96.8 × 105.8 × 58.8mm

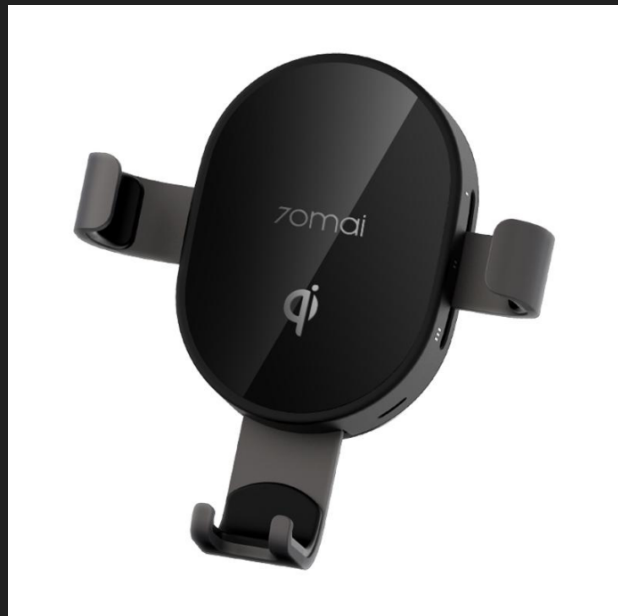

70Mai Air Purifier

Online Date 2019/2

Version English Version

Specification

Input: 5.0V 1.5A

Sound decibels:55dB(A)

Work Temperature:

-20°C ~ 70°C

Storage Temperature:

-30°C ~ 85°C

Dimension: 158 × 122 × 75mm



70Mai Air Bump

Online Date 2019/7

Version English/Russian/Japanese/Korean

Specification

Input:

12.0V 10.0A MAX

Air flow volume:41L/min(0 Bar)

Diameter:30mm

Sound decibels:≤72dB (A)

Work Temperature:

-20°C ~ 70°C

Storage Temperature:

-30°C ~ 85°C





70Mai Jump Starter

Online Date 2019/7

Version English/Russian/Japanese/Korean

Specification

Input:Type-C

5.0V 2.0A

Output:5.0V 2.4A

12.0V 250~600A

Work Temperature:

Charging:0°C ~ 45°C

Discharge:-20°C ~ 60°C

Storage Temperature:

-30°C ~ 80°C

70Mai Car Charge

Online Date 2019/4

Version English Version

Specification

Input:DC 12V/24V

Output:DC 5V/1A

QC3.0:5V 3A/9V 2A/12V 1.5A

Work Temperature:

0°C ~ 30°C

Storage Temperature:

-30°C ~ 85°C

Waterproof and dustproof:IPx2



70Mai Socket Cigarette Lighter

Online Date 2019/4

Version English Version

Specification

Output:

Car charger interface:

12-24V 3A(MAX)

USB interface:

5.0V 2.4A

5.0V 4.8A(MAX)

Dimension: 85 × 84 × 87.5mm



