

# Thunder (LEISHI) KTV professional wireless microphone Manual

## Warranty conditions

Three guarantees include: in the presence of a sales receipt, warranty repair, warranty return, guarantee exchange

1. If there are questions about the quality of the goods, within 7 days from the date of purchase of the goods, Thunder (LEISHI) KTV professional wireless microphone, in the presence of a commodity check, the Buyer may, at the invoice price, return and replace the goods or exchange the goods purchased by him one time.
2. If the goods do not correspond to the quality declared by the manufacturer, within 15 days from the date of purchase of the goods, Thunder (LEISHI) KTV professional wireless microphone, the Buyer can return or exchange the goods purchased by him.
3. Within 12 months from the date of purchase, the goods of poor quality can be repaired free of charge.

## Precautionary measures

The following items are not included in the warranty terms:

1. Denial of service in case of misuse, maintenance and storage.
2. Expiration of the warranty period.
3. Fire, flood, thunder and other force majeure circumstances Accidents or damage resulting from unauthorized maintenance.
4. Thunder (LEISHI) KTV professional wireless microphone Manual.

## Main settings

### Radio microphone

Operating voltage:	2.2V – 3V
--------------------	-----------

Power supply:	Finger-type batteries (2 pcs per microphone)
---------------	---

Adaptation method:	with a movable coil
--------------------	---------------------

Directivity:	hypercardioid
--------------	---------------

Frequency range:	70Hz – 15kHz
------------------	--------------

Degree of distortion (total harmonic distortion):	0.25%
---	-------

Signal to noise ratio:	86 dB (@ 1 kHz)
------------------------	-----------------

Operating frequency range:	5.2 G / 5.8G industrial, scientific and medical range
-------------------------------	--

### Wireless radio transmitter

Operating voltage:	5V
--------------------	----


Power supply:	USB port
---------------	----------

Receiving channel:	2
--------------------	---

Sampling frequency:	48 kHz
---------------------	--------

Adaptive sampling:	16Bit
--------------------	-------

## Packing list

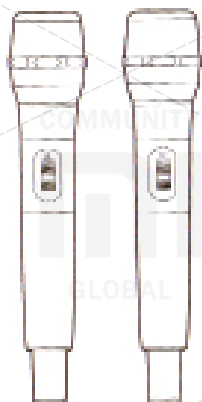

2 Thunder (LEISHI) KTV  
professional wireless  
microphone



4 Finger-type  
batteries



1 wireless  
transmitter

## Interface Function




Battery cover



led indicator  
Power switch  
Start button

## Introductory instruction

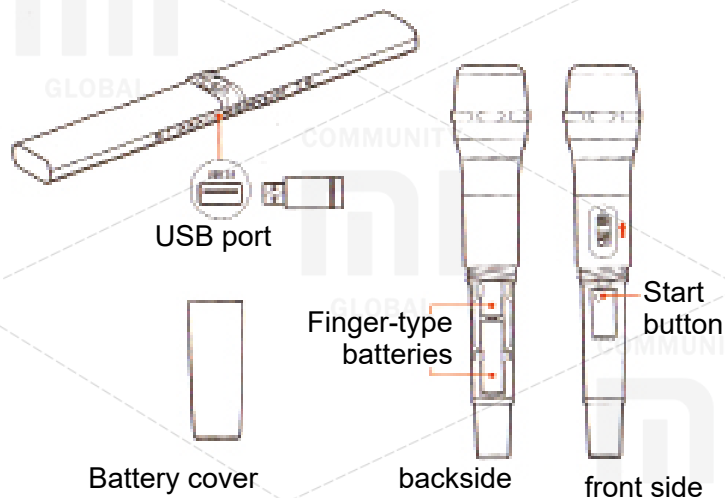

**Note:** If the LED indicator lights up slowly, it means that the wireless microphone is not connected to the wireless radio transmitter. Make sure that the transmitter is in working order or restart it.

### 1 Turning on the wireless radio transmitter

Insert the Xiaomi wireless radio transmitter into the USB port of the TV

### 2 Installing the battery

Open the battery cover of the microphone, insert two finger-type batteries into the battery compartment

- 3 On the TV **enter** the menu «**Settings Xiaomi**» / Peripheral device bluetooth / Wireless microphone / Add Thunder (LEISHI) KTV professional wireless microphone. Turn on the power supply / ON / turn on the microphone by pressing the button for 5 seconds, until the LED lights up. After the appearance of the microphone on the TV screen, the LED indicator will be constantly on. Close the battery cover and the device is ready for use. During further use, open the microphone switch and you can automatically attach it.

When the red LED button is lit, it means low battery. Please timely replace the battery.